


SHRINK TANK MODEL ACI-440 (AUTOMATIC CONTINUOUS IMMERSION)

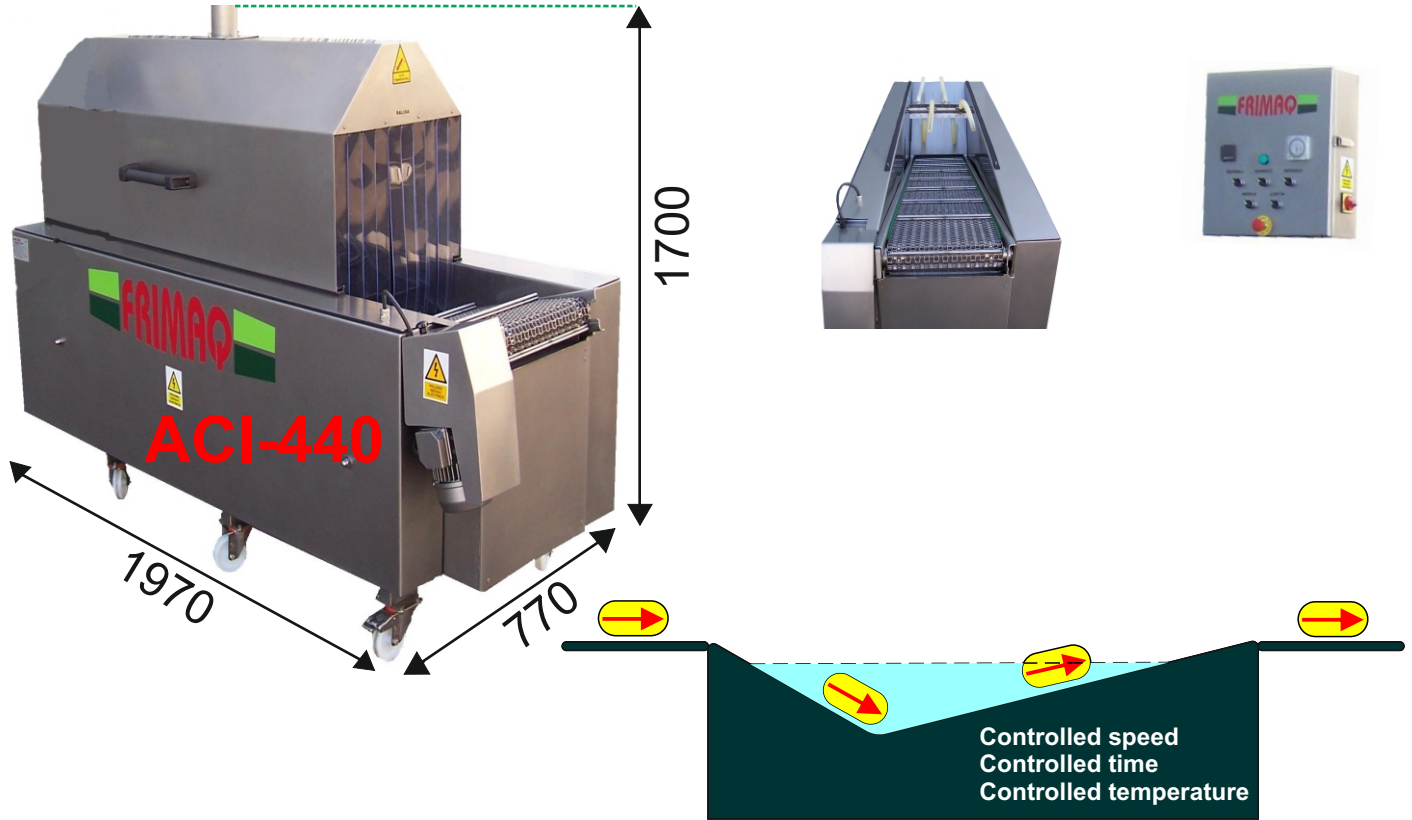

OPERATION:

The product automatically enters and makes shrink process continuously without stops.

WEIGHT

400 Kg. Aprox.

WATER

Working pressure 2-6 Bar

INTERNAL MEASURES

930x440 mm
Immersion height of 250 to 300 mm

FEATURES

- Built in stainless steel. AISI 304
- CE Certification
- Electrical panel to hang on the wall or the tank itself
- Shrink controlled by tape speed
- Water tank of 175 to 200 liters
- Wheels for easy portability
- Noria needed to prevent buoyancy of the products
- Motorized belt



VAPOUR HEATING VERSION

VAPOUR

Minimum inlet pipe diameter 3/4"
Working pressure 2-4 Bar
Consumption 70-120 Kg/h



Compressed air

Pressure 4-8 Bar
Consumption 50 l / minute

ELECTRICITY

Voltage 400V
Phases 3P+N+ Ground
Frequency 50/60 Hz
4 kW maximum power



ELECTRICITY HEATING VERSION

ELECTRICITY

Voltage 400V
Phases 3P+N+Ground
Frequency 50/60 Hz
Maximum power 27-40 Kw According equipment.



Resistances of 3.750 W