
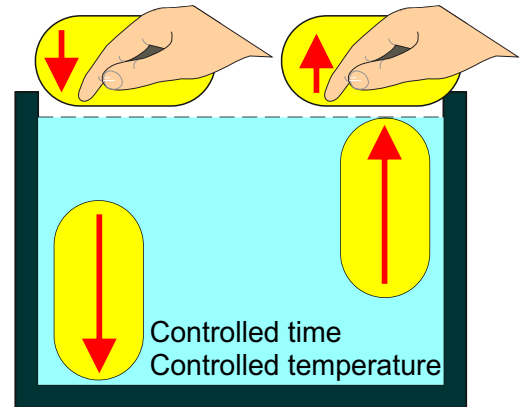
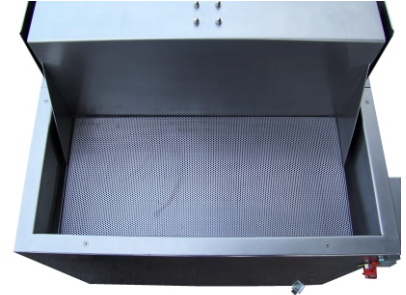


SHRINK TANK MODEL MI-440 (MANUAL IMMERSION)

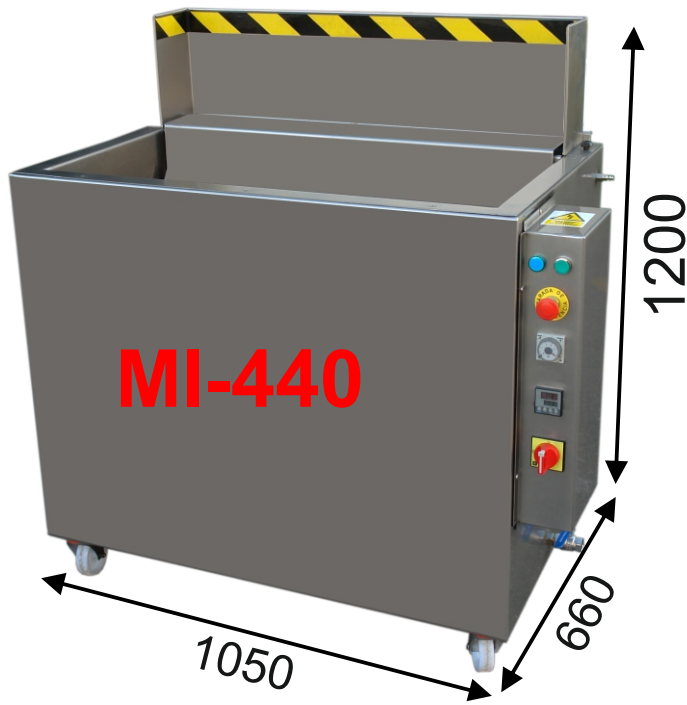

OPERATION:

The product is placed manually and submerged during the scheduled time when you press the start button.

WEIGHT

200 Kg. Aprox.

WATER

Working pressure 2-6 Bar

Compressed air

Pressure 4-8 Bar
Consumption 50 l / minute

FEATURES

Built in stainless steel. AISI 304
CE Certification
Adjustable immersion time
Water tank of 100 to 120 liters
Wheels for easy portability

INTERNAL MEASURES

930x440 mm
Immersion height of 250 to 300 mm



VAPOUR HEATING VERSION

VAPOUR

Minimum inlet pipe diameter 3/4"
Working pressure 2-4 Bar
Consumption 50-90 Kg/h



ELECTRICITY

Voltage 400V
Phases 3P +N+ Ground
Frequency 50/60 Hz
1 kW maximum power



ELECTRICITY HEATING VERSION

ELECTRICITY

Voltage 400V
Phases 3P+N+Ground
Frequency 50/60 Hz
Maximum power 12-20 Kw According equipment.



Resistances of 3.000 W